


# Mechanical Seal

# Model BTMG13

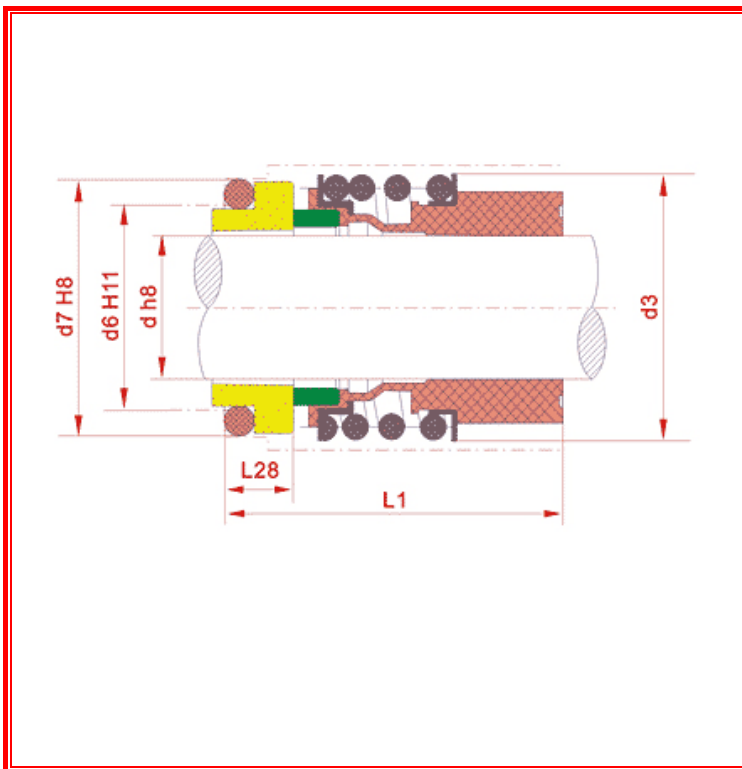

## OPERATING LIMITS

Temperature:  $-20^{\circ}\text{C} \sim +120^{\circ}\text{C}$

Pressure:  $\leq 1.2\text{MPa}$

Speed:  $\leq 10\text{m/s}$

## Standard Materials

- Stationary Ring(Ceramic/SiC/TC)
- Rotary Ring(Carbon/SiC)
- Retainer(SUS304/SUS316)
- Spring(SUS304/SUS316)
- Spring Holder(SUS304/SUS316)
- Bellows(NBR/EPDM/VITON)
- O-Ring(NBR/EPDM/VITON)

Seal size d(mm)	d3	d6	d7	L1	L3
24	42.5	33	39	50	7.5
25	42.5	34	40	50	7.5
28	49.0	37	43	50	7.5
30	49.0	39	45	50	7.5
32	53.5	42	48	55	7.5
35	57.0	44	50	55	7.5
38	59.0	49	56	55	9.0
40	62.0	51	58	55	9.0